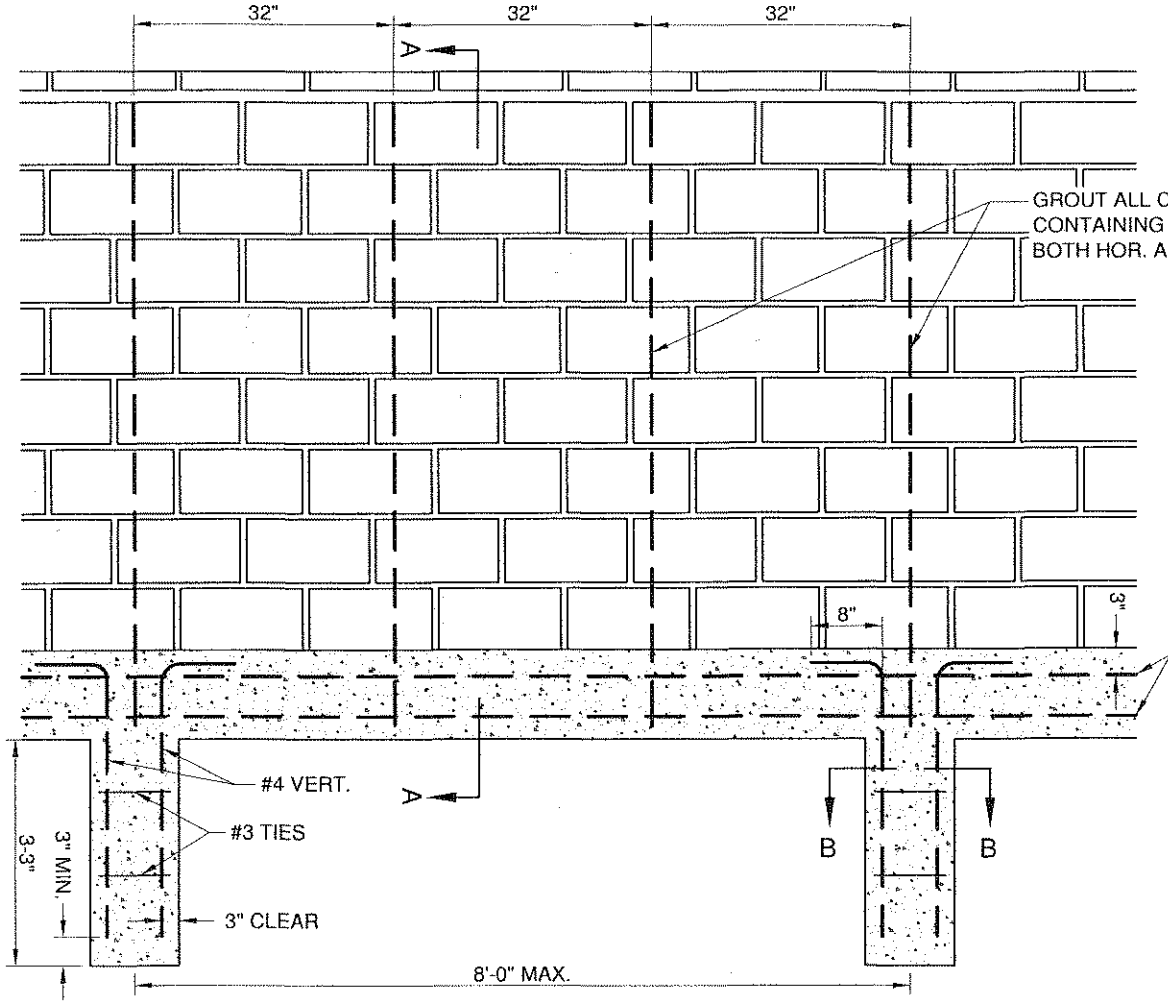

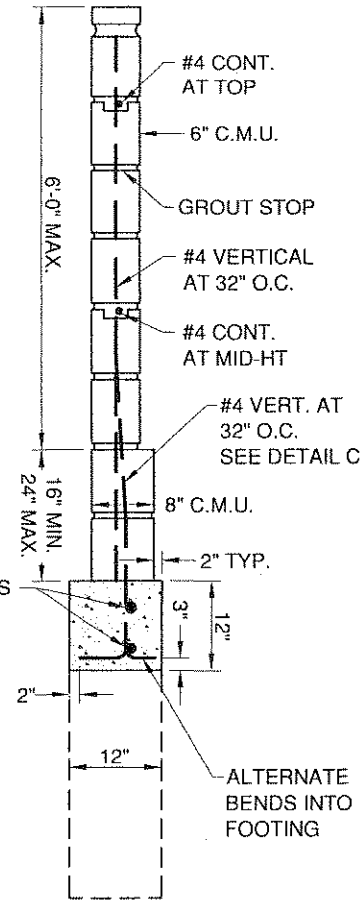

SECTION A-A

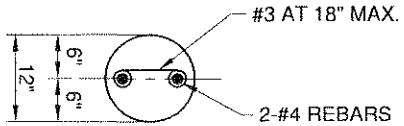

SECTION B-B



DETAIL C

NOTES:

1. ALL BARS TO BE DEFORMED PER ASTM DESIGNATION A615, GRADE 40.
2. NO SURCHARGE HAS BEEN PROVIDED IN THE DESIGN OF THIS WALL.
3. CONCRETE BLOCK WALL TO MEET ASTM DESIGNATION C90-52.
4. GROUT TO BE 1:3 MAXIMUM.
5. BLOCK WALL TO BE CONSTRUCTED PRIOR TO SIDEWALK CONSTRUCTION.
6. MATERIALS DATA:
   f'c = COMPRESSIVE STRENGTH (CONCRETE) = 2000 PSI AT 28 DAYS, USE TYPE V CEMENT.
   f'm = COMPRESSIVE STRENGTH (MASONRY) = 1500 PSI, NO SPECIAL INSPECTION REQUIRED.
7. ALL WALLS START AND TERMINATE WITH PILASTER FOOTING.

APPROVED:
P.W. DIRECTOR / CITY ENGINEER
REVISED DATE: 5/15/08

WESTMINSTER CALIFORNIA

City of Westminster
DEPARTMENT OF PUBLIC WORKS

6" C.M.U. - 8' HIGH
MASONRY WALL

STANDARD NUMBER
607B