Plan View

12'

6" | 30" | 6" | 8' | 6"

8" WIDE 6" HIGH CURB

42"

30"

42"

0.5%

7'-0"

7'-0"

4" PCC PAD

6" WIDE 6" HIGH CURB

HEAVY DUTY SQUARE STOCKS
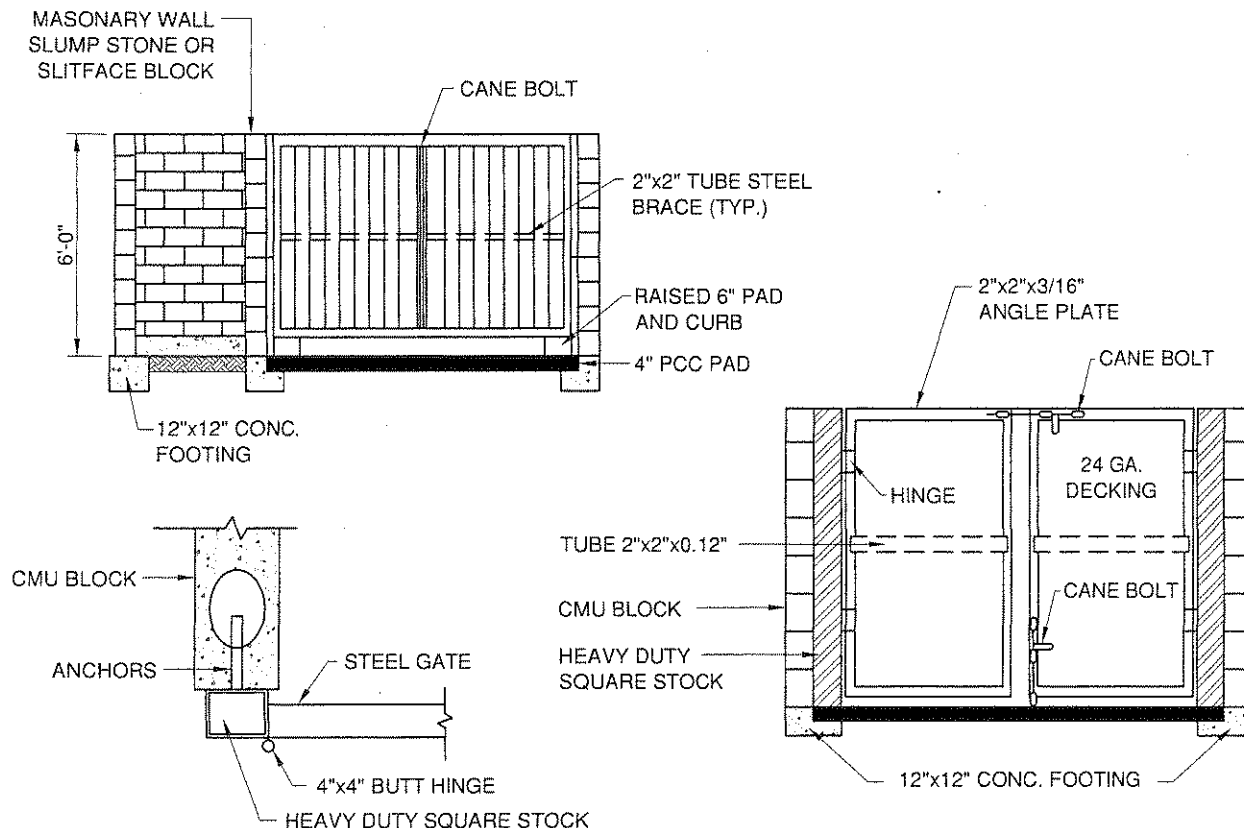
6" WIDE 6" HIGH CURB

6'x8'x4" THICK PCC APRON (MIN)

NOTES:

* MASONRY CONSTRUCTION SHALL CONFORM TO STD. DWG. # 607.
* MATERIALS: SIX INCH BLOCK CONSTRUCTION WITH WOOD OR METAL OPAQUE GATES. SET ON FOUR INCH P.C.C. PAD. PAD TO BE AT GROUND LEVEL. ALL HARDWARE SHALL BE CORROSION RESISTANT. MATERIALS AND SETBACKS SHALL CONFORM TO CITY STDS.
* PROVIDE 4" P.C.C. APRON IN FRONT OF ENCLOSURE GATES FOR BIN UNLOADING. (MIN. 6'x8')
* A TRELLIS OR LATTICE COVER REQUIRED WHEN ENCLOSURE IS LOCATED IN VICINITY OF TWO-STORY RESIDENTIAL STRUCTURES.
* ANY VARIATIONS FROM THESE STANDARDS MUST BE APPROVED BY THE CITY ENGINEER

MASONARY WALL SLUMP STONE OR SLITFACE BLOCK

CANE BOLT

2"x2" TUBE STEEL BRACE (TYP.)

6'-0"

RAISED 6" PAD AND CURB

4" PCC PAD

12"x12" CONC. FOOTING

CMU BLOCK

ANCHORS

STEEL GATE

4"x4" BUTT HINGE

HEAVY DUTY SQUARE STOCK

2"x2"x3/16" ANGLE PLATE

CANE BOLT

HINGE

24 GA. DECKING

TUBE 2"x2"x0.12"

CMU BLOCK

HEAVY DUTY SQUARE STOCK

CANE BOLT

12"x12" CONC. FOOTING

City of Westminster
DEPARTMENT OF PUBLIC WORKS

SINGLE TRASH ENCLOSURE

STANDARD NUMBER

610